

Transmittance **$U_w \geq 0.85$ (W/m²K)**

Consult typology, dimensions and glass.

Acoustic insulation

Maximum glazing	40 mm
Minimum glazing	26 mm
Maximum acoustic insulation	Rw = 46 dB

Sightlines

Frame	70-232 mm
Sash	70 mm

Profile Thickness

Window	1.9 mm
--------	--------

Polyamide strip length 35 mm**Maximum sash dimensions****Standard solution**

Width (L)	1,300 mm
Height (H)	2,400 mm

HD Hinges (side hung)

Width (L)	1,200 mm
Height (H)	3,500 mm

Consult maximum dimensions according to typologies.

Maximum sash weight 160 kg

Consult maximum weight according to typologies.

Certificates

DTA certification from CSTB lab.

**Categories achieved at test centre**

Protection against atmospheric agents.

Air permeability**(UNE-EN 12207): Class 4****Watertightness****(UNE-EN 12208): Class E1650****Wind resistance****(UNE-EN 12210): Class C5**

* Reference test 1.23 x 1.48 m / 1 sash.

Test verified by

ALUMINIOS CORTIZO S.A.U.**Extrusion alloy**

6063 T-5

Finishes

Possibility of dual colour

Colour powder coating (RAL, mottled & rough)

According to Qualicoat >60 microns

Wood effect powder coating


According to Qualideco standard

Anodising

According to Ewva Euras / Standard Class 15 / Optionally Class 20 and 25

Opening possibilities

Inward opening: 1 & 2 sash side hung, 1 & 2 sash tilt & turn, parallel sliding and bottom hung.

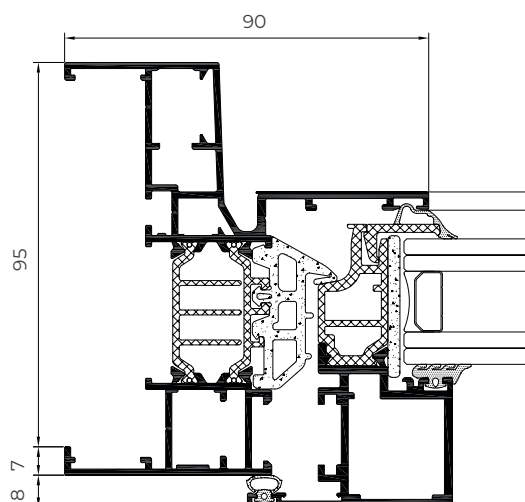

* Perimeter frame